



POINTED TIP PLUG & JACK THERMOCOUPLE

PO STYLE

- PROBE RATED TO 500°F
- STANDARD CONNECTORS RATED TO 400°F
- QUICK RESPONSE
- SPECIAL LIMITS OF ERROR MATERIAL

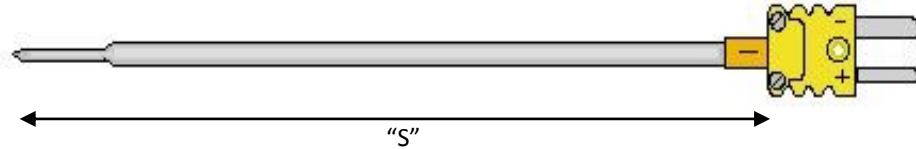

ASSEMBLY NO.



CALIBRATION

- K = Chromel®/Alumel®
- J = Iron/Constantan®
- T = Copper/Constantan®
- E = Chromel®/Constantan®

SHEATH DIAMETER

5 = .125"

SHEATH LENGTH "S"

01 to 06 (whole inches)
Consult factory for lengths over 6"

SHEATH MATERIAL

3 = 316 SS

SPECIAL REQUIREMENT

If required, enter "X"
and Consult Factory

TERMINATION

- P = Standard Male Plug (400°F)
 - J = Standard Female Jack (400°F)
 - M = Miniature Male Plug (400°F)
 - F = Miniature Female Jack (400°F)
- (Compression Adaptors Available)**

JUNCTION TYPE

SINGLE ELEMENT

G = Grounded

