

- IDEAL FOR -80°C to 200 °C AIR TEMPERATURE MEASUREMENT
- FEP TEFLON® (200°C) INSULATED
- DUAL WALL POLYOLEFIN STRAIN RELIEF RATED -55 °C to 110 °C
- 22 AWG STRANDED TYPE "T"



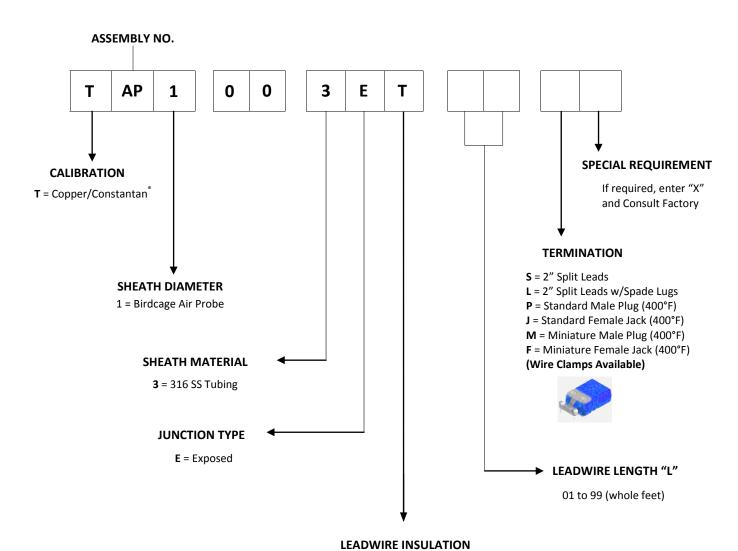

T = 22 AWG Stranded FEP Teflon® (-196°C -200 °C) Freezers / LN2

Accuracy: 0 °C to 125 °C ±0.3 °C At -80 °C should be with in ±1.0 °C No specification at -196 °C