
- DIN CLASS 'A' TOLERANCE, 0.00385 ALPHA IS STANDARD
- 100 $\,\Omega$ Pt., 500 $\,\Omega$ Pt., & 1000 $\,\Omega$ Pt. RTDs ARE AVAILABLE
- STAINLESS STEEL SPRING STANDARD

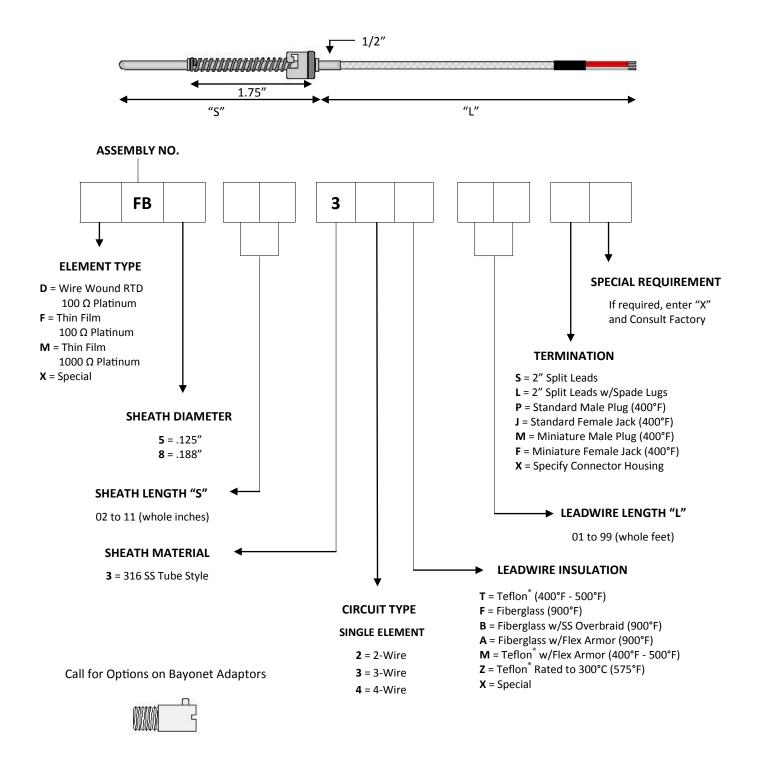

RTD Selection Guide