PLUG & JACK RTD

PP STYLE

- *DIN CLASS 'A' TOLERANCE, 0.00385 ALPHA IS STANDARD*
- *100* Ω Pt., *500* Ω Pt., & *1000* Ω Pt. RTDs ARE AVAILABLE
- *POINTED TIP PROBE AVAILABLE*

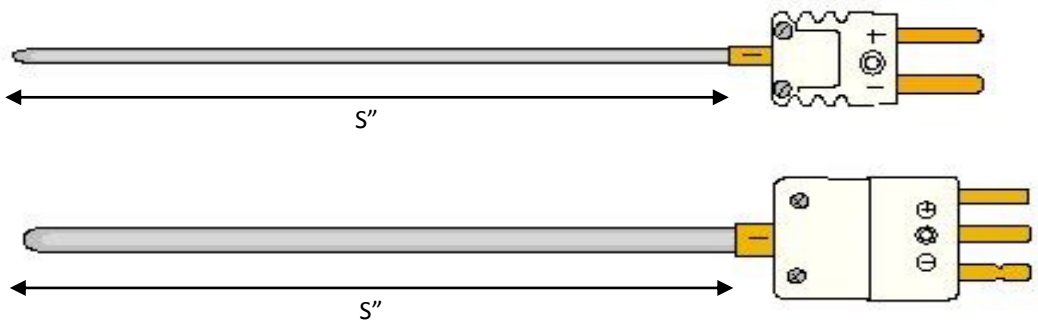

ASSEMBLY NO.

	PP						0	0	0		

ELEMENT TYPE

D = Wire Wound RTD
100 Ω Platinum
F = Thin Film
100 Ω Platinum
M = Thin Film
1000 Ω Platinum
X = Special

SHEATH DIAMETER

5 = .125"
6 = .063"
7 = .250"
8 = .188"

SHEATH LENGTH "S"

01 to 12 (whole inches)
Consult factory for lengths over 12"

CIRCUIT TYPE

SINGLE ELEMENT

2 = 2-Wire
3 = 3-Wire

SHEATH MATERIAL

3 = 316 SS Tube Style
M = Mineral Insulated 316 SS (Max. 1,000°F)

TERMINATION

P = Standard Male Plug (400°F)
J = Standard Female Jack (400°F)
M = Miniature Male Plug (400°F)
F = Miniature Female Jack (400°F)

SPECIAL REQUIREMENT

If required, enter "X"
and Consult Factory