


# SPRING BAYONET RTD

## RS STYLE

- DIN CLASS 'A' TOLERANCE, 0.00385 ALPHA IS STANDARD
- 100 Ω Pt., 500 Ω Pt., & 1000 Ω Pt. RTDs ARE AVAILABLE
- 8" STAINLESS STEEL SPRING STANDARD

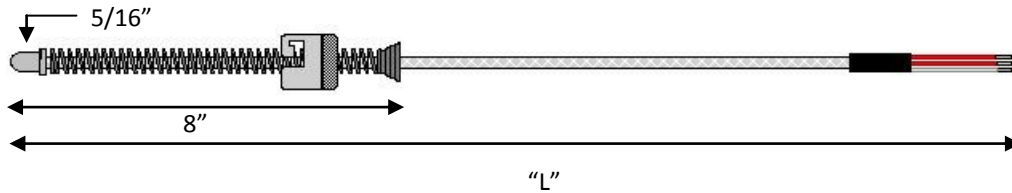

### ASSEMBLY NO.

	RS	8	0	0	3				
--	----	---	---	---	---	--	--	--	--

#### ELEMENT TYPE

**D** = Wire Wound RTD  
100 Ω Platinum  
**F** = Thin Film  
100 Ω Platinum  
**M** = Thin Film  
1000 Ω Platinum  
**X** = Special

#### SHEATH DIAMETER

8 = .188"

#### SHEATH MATERIAL

3 = 316 SS Tube Style

#### CIRCUIT TYPE

##### SINGLE ELEMENT

2 = 2-Wire  
3 = 3-Wire  
4 = 4-Wire

#### SPECIAL REQUIREMENT

If required, enter "X"  
and Consult Factory

#### TERMINATION

**S** = 2" Split Leads  
**L** = 2" Split Leads w/Spade Lugs  
**P** = Standard Male Plug (400°F)  
**J** = Standard Female Jack (400°F)  
**M** = Miniature Male Plug (400°F)  
**F** = Miniature Female Jack (400°F)  
**X** = Specify Connector Housing

#### LEADWIRE LENGTH "L"

01 to 99 (whole feet)

#### FLEX ARMOR LEADWIRE INSULATION

**T** = Teflon® (400°F - 500°F)  
**F** = Fiberglass (900°F)  
**B** = Fiberglass w/SS Overbraid (900°F)  
**Z** = Teflon® Rated to 300 °C (575°F)  
**X** = Special

Call for Options on Bayonet Adaptors

