
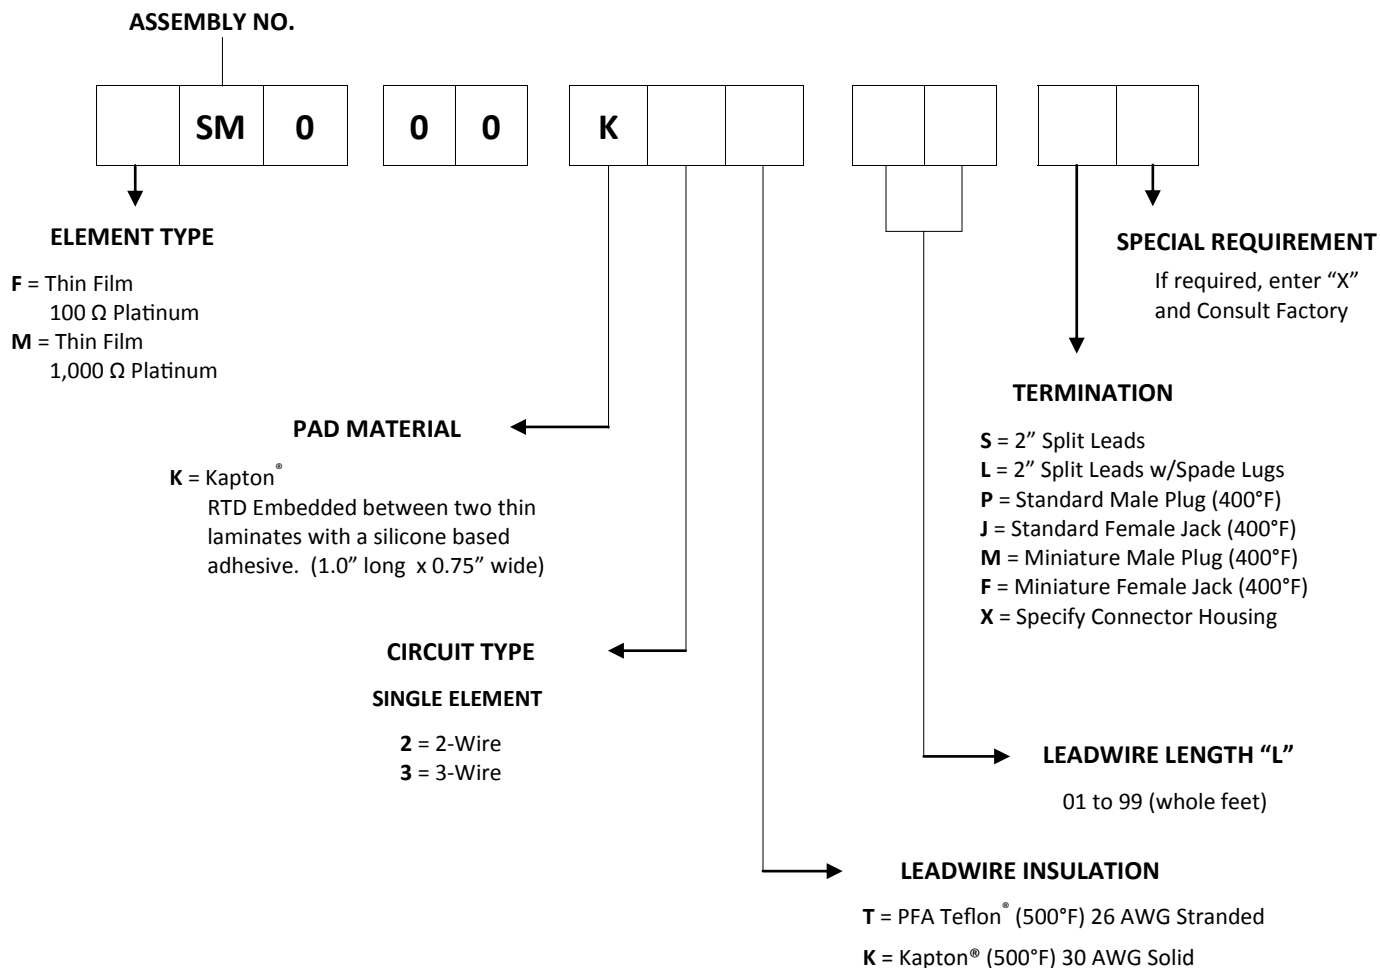


STICK-ON RTD

SM STYLE

- IDEAL FOR FLAT OR CURVED SURFACES
- DIN CLASS 'A' TOLERANCE, 0.00385 ALPHA IS STANDARD
- THIN FILM RTD ELEMENT
- SELF-ADHESIVE BACKING GOOD UP TO 500°F

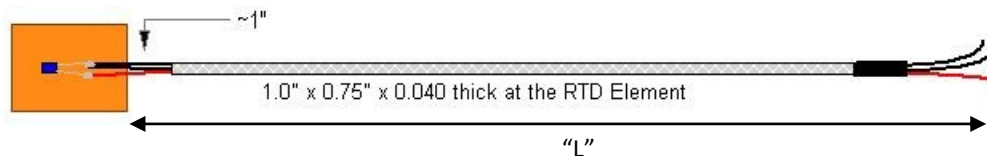

Self-Adhesive Stick-On RTD

Ready to directly stick in place. The RTD is embedded between two thin laminates for surface applications by adhesive bonding. Low thermal inertia results in fast response while electrically isolated with the surface. **Good for temperature to 500°F continuous**. Make sure surface is dry and clean before application.