



FIXED BAYONET THERMOCOUPLE

TB STYLE

- FIXED BAYONET WITH SS SPRING
- AVAILABLE IN 1/8" & 3/16" DIAMETER SHEATH
- SPECIAL LIMITS OF ERROR MATERIAL

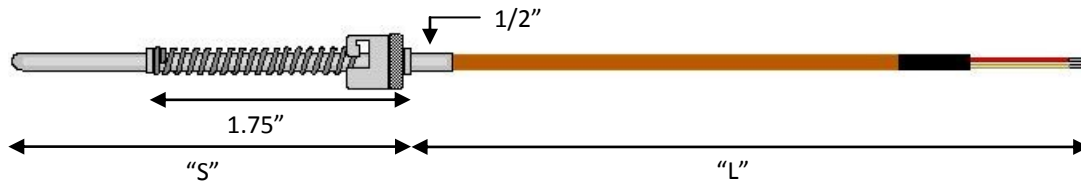

ASSEMBLY NO.



CALIBRATION

- K = Chromel[®]/Alumel[®]
- J = Iron/Constantan[®]
- T = Copper/Constantan[®]
- E = Chromel[®]/Constantan[®]

SHEATH DIAMETER

- 5 = .125"
- 8 = .188"

SHEATH LENGTH "S"

02 to 12 (whole inches)

SHEATH MATERIAL

3 = 316 SS Tubing

JUNCTION TYPE

SINGLE ELEMENT

- G = Grounded
- U = Ungrounded

SPECIAL REQUIREMENT

If required, enter "X" and Consult Factory

TERMINATION

- S = 2" Split Leads
 - L = 2" Split Leads w/Spade Lugs
 - P = Standard Male Plug (400°F)
 - J = Standard Female Jack (400°F)
 - M = Miniature Male Plug (400°F)
 - F = Miniature Female Jack (400°F)
- (Wire Clamp Available)**



LEADWIRE LENGTH "L"

01 to 99 (whole feet)

LEADWIRE OPTIONS

	STANDARD	SS OVERBRAID	FLEX ARMOR
SOLID			
Fiberglass (900°F)	= F	B	A
Teflon [®] (500°F)	= T	E	M
STRANDED			
Fiberglass (900°F)	= G	D	R
Teflon [®] (500°F)	= N	V	L

Call for Options on Bayonet Adaptors

